Air Logic.

Pneumatic Components and Systems



Plastic Fittings



Introduction to Air Logic

Air Logic is a manufacturer of various pneumatic accessories, ideal for instrumentation, medical and industrial applications.

The Plastic Fittings include Bulkhead Connectors, Miniature Unions, Reducing Connectors, Barbed Fittings, Tees, Elbows, Crosses, 10-32 Plugs and Nipples, Straight Swivels, Swivel Elbows and Tees (Patent #4,946,204).

The Multiple Bulkhead Connectors are precision molded of polysulfone and are available in two models, the 10-tube and 32-tube connector. The 10-tube connector seals with a press fit and can be panel mounted. The 32-tube connector is joined together by two hex head screws and is panel mounted.

The Standard Bulkhead Connectors are precision molded of nylon or polypropylene. They are available in two models, the Reducing or Straight Bulkhead Connector. The connectors join 1/16",1/8" or .170 I.D. tubing and are panel mounted.

The Unions are precision molded of polysulfone or polypropylene, which join 1/16" I.D. or 1/8" I.D. flexible tubing.

The Reducing Connectors are precision molded of polysulfone; they join 1/16" I.D. to 1/8" or 1/16" I.D. to .170 I.D. flexible tubing.

The Swivel Fittings (Patent #4,946,204) are available in three models, the Straight Swivel, the Swivel Elbow and the Swivel Tee. The swivels are available with barbs for 1/16", 3/32", or 1/8" I.D. flexible tubing. The swivels are available with 10-32 UNF threads, 1/8-27 NPT or 1/4-18 NPT. The unique design (Patent #4, 946,204) allows the fitting to swivel 360°. The snap type fitting is sealed with a Buna-N o-ring. The Swivel fittings are precision molded of nylon.

The Multiple Barbed Fittings are precision molded of nylon or polypropylene.

The celcon Plastic Tee joins 1/16" I.D. flexible tubing together. The 10-32 Plug and Nipple are precision molded of nylon or polypropylene.

The 10-32 Barbed Fittings are available with barbs for 1/16" I.D., 1/8" I.D. or .170 I.D. flexible tubing.

The unique design of the barbed fitting allows the 10-32 threads to seal without a gasket. The barbed fitting does not have a molded parting line on the first barb. This prevents the fitting from leaking. Air Logic fittings feature miniature size, low cost and precision molding.

Logic and Lare trademarks of Air Logic registered in the United States Patent and Trademark Office.

Standard Bulkhead Connectors Reducing Bulkhead......2 Straight Bulkhead......2 Multiple Bulkhead Connectors 10-Tube Connector3 32-Tube Connector3 **Plastic Fittings** 10-32 Plug and Nipple......3 Barbed Reducer.....4 Barbed Fittings......4 Tees......4 **Multiple Barbed Fittings** Unions, Elbows, Tees and Crosses.....5 **Swivel Fittings** 10-32 Swivel Elbows and Tees6 1/8-27 Swivel Elbows and Tees7 1/4-18 Swivel Elbows and Tees8 **Swivel Fittings** 10-32 Straight Swivels9 1/8-27 Straight Swivels9 1/4-18 Straight Swivels10


Fitting Selection Guide

Please order by Model Number. The numbers in the various positions determine Thread Size, Fitting Group, Port Connection and Fitting Arrangement, Color and Material.

Nylon Material: Black is the standard color for all nylon fittings. White, Blue and Red nylon are available in the Plug, Nipple and Barb Fittings. The Union, Elbow, Tee and Cross are available in White, or Black Nylon.

Polypropylene Material: gray is the standard color for all polypropylene fittings. An example of the fitting selection is shown below:


Model Number Selection

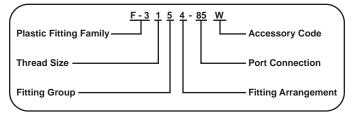

Model Number Selection by Position		
Number Position	Accessory Number	Description
F-3154-85	F-3	Plastic Fitting Family
Thread Size F-3 <u>1</u> 54-85	1	10-32 UNF Threads
	2	1/8-27 NPT Threads
	3	1/4-18 NPT Threads
Fitting Group F-31 <u>54</u> -85	03	Multiple Bulkhead Connector
	00	Straight Bulkhead Connector
	20	Union, Reducers, Barb Fitting
	40	Barbed Unions, Elbows, Tees, & Crosses
	45	Straight Tee
	50	Straight Swivel
	54	Swivel Elbow
	55	Swivel Tee
Fitting Arrangement F-315 <u>4-</u> 85	4	Elbow
	5	Tee
	6	Cross
Port Connections F-3154- <u>85</u>	20	Plug
	25	Nipple
	41	Union - Straight Ports for 1/16" I.D. Tubing
	42	Union - Barbed Ports for 1/16" I.D. Tubing
	43	Union - Barbed Ports for 1/8" I.D. Tubing
	65	Tee - Straight Ports for 1/16" I.D. Tubing
	68	Reducer for .170 to 1/16" I.D. Tubing
	70	Reducer for 1/8" to 1/16" I.D. Tubing
	71	Reducer for .170 to 1/8" I.D. Tubing
	80	Barb for 1/16" I.D. Tubing
	83	Barb for 3/32" I.D. Tubing
	85	Barb for 1/8" I.D. Tubing
	86	Barb for .170 I.D. Tubing
Accessory Code F-3120-20- <u>PP</u>	W	White
	В	Blue
	R	Red
		Black - Standard Color
	PP	Polypropylene

Standard Bulkhead Connectors

F-3100-68 Reducing Bulkhead Connector




Barbed ports for .170 I.D. to $\frac{1}{10}$ I.D. flexible tubing. External $\frac{1}{10}$ -28 UNF threads for panel mounting. Material: Nylon - Black or White

Polypropylene - Gray


F-3100-70

Reducing Bulkhead Connector



Barbed ports for ½" I.D. to ½" I.D. flexible tubing. External ½-28 UNF threads for panel mounting. Material: Nylon - Black or White Polypropylene - Gray

F-3100-71 Reducing Bulkhead Connector




Barbed ports for .170 I.D. to 1/3" I.D. flexible tubing. External 1/4-28 UNF threads for panel mounting.

Material: Nylon - Black or White Polypropylene - Gray

) = Metric Dimensions

F-3100-80


Straight Bulkhead Connector



Barbed ports for 1/16" I.D. flexible tubing. External 1/4-28 UNF threads for panel mounting. Material: Nylon - Black or White Polypropylene - Gray

F-3100-85

Straight Bulkhead Connector



Barbed ports for ½" I.D. flexible tubing.


External ½-28 UNF threads for panel mounting.

Material: Nylon - Black or White

Polypropylene - Gray

F-3100-86

Straight Bulkhead Connector



Barbed ports for .170 I.D. flexible tubing. External ¼-28 UNF threads for panel mounting.


Material: Nylon - Black or White Polypropylene - Gray

Standard Bulkhead Connectors

F-3103-Series


10 Tube Connector

F-3103-101

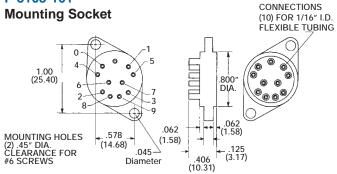

F-3103-102

Connector Plug

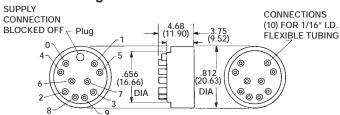


The F-3103-101 Mounting Socket and F-3103-102 Connector Plug form a ten tube connector when used together. The Mounting Socket may be panel or bulkhead mounted. Order each separately by model number.

Material: Polysulfone.

F-3103-320

32 Tube Connector

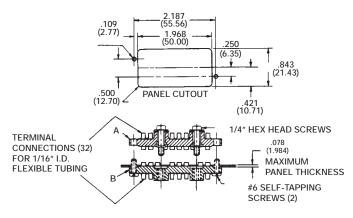

The Connector joins up to 32 tubes of $\frac{1}{16}$ " I.D. tubing. The connector is joined together by two hex head screws and can be panel mounted.

Material: Polysulfone.

) = Metric Dimensions

Plastic Fittings

F-3120-20


Plug

.312 (7.92) .245 (6.22)

10-32 UNF hex head plug Material: Nylon - Black, Red, White or Blue Polypropylene - Gray


F-3120-25

Nipple




10-32 UNF hex head plug Material: Nylon - Black, Red, White or Blue Polypropylene - Gray

F-3120-41

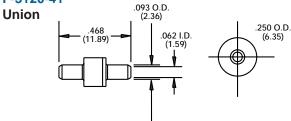

Straight ports for 1/16" I.D. flexible tubing. Material: Polysulfone

F-3120-42

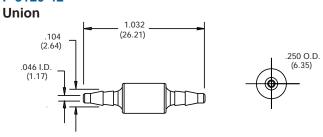


Barbed ports for % I.D. flexible tubing. Material: Polysulfone

Plastic Fittings

F-3120-43


Union

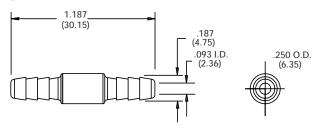

Barbed ports for 1/8" I.D. flexible tubing. Material: Polysulfone.

F-3120-68

Barbed Reducer




A straight port for % I.D. flexible tubing at one end and a barbed connection for % or .170 I.D. flexible tubing at the other end.

Material: Polysulfone.

F-3120-70


Barbed Reducer

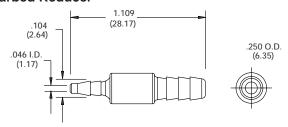

Barbed ports for $\frac{1}{10}$ I.D. x $\frac{1}{10}$ I.D. flexible tubing. Material: Polysulfone.

F-3145-65


Tee

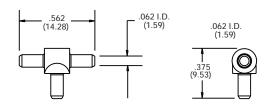

Straight ports for 1/16" I.D.flexible tubing. Material: Celcon


() = Metric Dimensions

F-3120-80

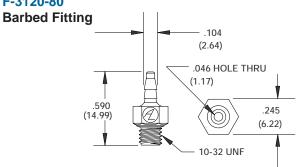


For 10-32 UNF x 1/16" I.D. flexible tubing Material: Nylon - Black, Red, White or Blue Polypropylene - Gray

F-3120-85

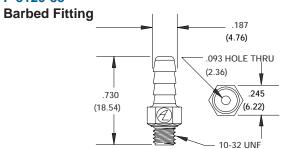

For 10-32 UNF x ½" I.D. flexible tubing Material: Nylon - Black, Red, White or Blue Polypropylene - Gray

F-3120-86 Barbed Fitting




For 10-32 UNF x .170 I.D. flexible tubing Material: Nylon - Black, Red, White or Blue Polypropylene - Gray

() = Metric Dimensions

Check Chemical Compatability of Polysulfone.


Plastic Fittings

F-3140-80

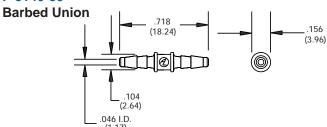


Barbed ports for 1/6" I.D. flexible tubing. Material: Nylon - Black or White Polypropylene - Gray

F-3144-80

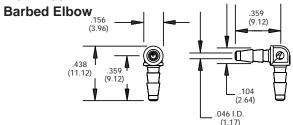

Barbed ports for 1/6" I.D. flexible tubing. Material: Nylon - Black or White Polypropylene - Gray


F-3145-80

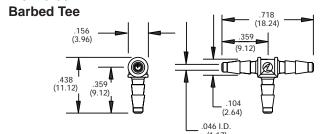

Barbed ports for 1/16" I.D. flexible tubing. Material: Nylon - Black or White Polypropylene - Gray

F-3146-80


Barbed Cross

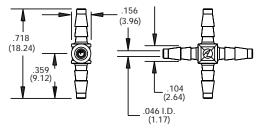

Barbed ports for 1/6" I.D. flexible tubing. Material: Nylon - Black or White Polypropylene - Gray


) = Metric Dimensions

F-3140-85

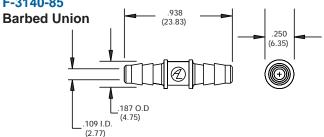


Barbed ports for 1/8" I.D. flexible tubing. Material: Nylon - Black or White Polypropylene - Gray

F-3144-85

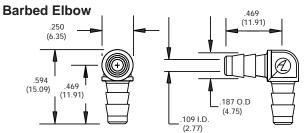

Barbed ports for 1/8" I.D. flexible tubing. Material: Nylon - Black or White Polypropylene - Gray


F-3145-85

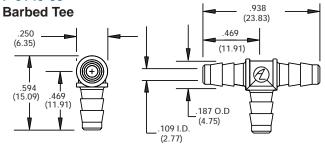

Barbed ports for 1/8" I.D. flexible tubing. Material: Nylon - Black or White Polypropylene - Gray

F-3146-85

Barbed Cross

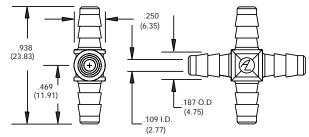


Barbed ports for \%" I.D. flexible tubing. Material: Nylon - Black or White Polypropylene - Gray

Swivel Elbow & Tee Fittings

Patent #4,946,204

F-3154-80

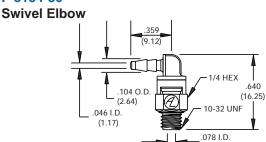


For 10-32 UNF x 1/6" I.D. flexible tubing. Swivels 360°. Buna-N o-ring seal.

Material: Nylon.

F-3154-83


Swivel Elbow



For 10-32 UNF x 3/2" I.D. flexible tubing. Swivels 360°. Buna-N o-ring seal.

Material: Nylon.

F-3154-85 **Swivel Elbow**




For 10-32 UNF x 1/8" I.D. flexible tubing. Swivels 360°. Buna-N o-ring seal.

Material: Nylon.

) = Metric Dimensions

F-3155-80

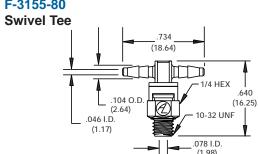


For 10-32 UNF x 1/6" I.D. flexible tubing. Swivels 360°. Buna-N o-ring seal.

Material: Nylon.

F-3155-83

Swivel Tee




For 10-32 UNF x 3/2" I.D. flexible tubing. Swivels 360°. Buna-N o-ring seal.

Material: Nylon.

F-3155-85

Swivel Tee




For 10-32 UNF x 1/3" I.D. flexible tubing. Swivels 360°. Buna-N o-ring seal.

Material: Nylon.

Swivel Elbow & Tee Fittings


Patent #4,946,204

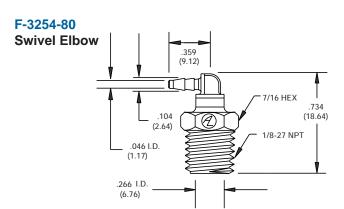

For ½-27 NPT x ½ I.D. flexible tubing. Swivels 360°. Buna-N o-ring seal.

Material: Nylon.






For ½-27 NPT x ½2" I.D. flexible tubing. Swivels 360°. Buna-N o-ring seal. Material: Nylon.

F-3254-85


Swivel Elbow



For %-27 NPT x %" I.D. flexible tubing. Swivels 360°. Buna-N o-ring seal.


Material: Nylon.

() = Metric Dimensions

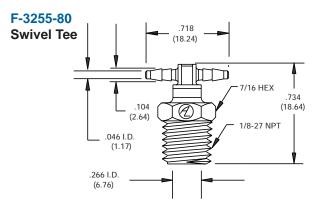

For ½-27 NPT x ½-" I.D. flexible tubing. Swivels 360°. Buna-N o-ring seal.


Material: Nylon.

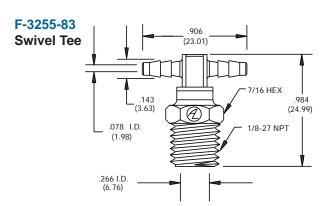

For %-27 NPT x %2" I.D. flexible tubing. Swivels 360°. Buna-N o-ring seal.

Material: Nylon.

F-3255-85

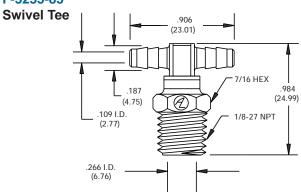

For %-27 NPT x %" I.D. flexible tubing. Swivels 360°. Buna-N o-ring seal. Material: Nylon.


() = Metric Dimensions

Check Chemical Compatability of Polysulfone.

Swivel Elbow & Tee Fittings

Patent #4,946,204


F-3354-80

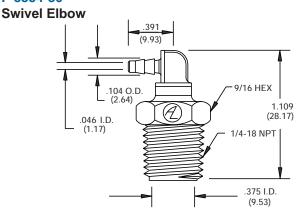

For $\frac{1}{4}$ -18 NPT x $\frac{1}{6}$ ° I.D. flexible tubing. Swivels 360°. Buna-N o-ring seal.

Material: Nylon.


F-3354-83

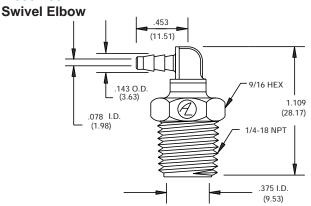

For $\frac{1}{4}$ -18 NPT x $\frac{3}{2}$ " I.D. flexible tubing. Swivels 360°. Buna-N o-ring seal.

Material: Nylon.

F-3354-85

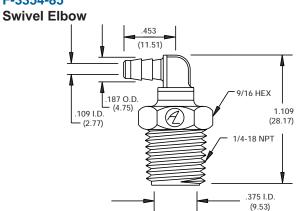


For $\frac{1}{4}$ -18 NPT x $\frac{1}{4}$ " I.D. flexible tubing. Swivels 360°. Buna-N o-ring seal.

Material: Nylon.

() = Metric Dimensions

F-3355-80

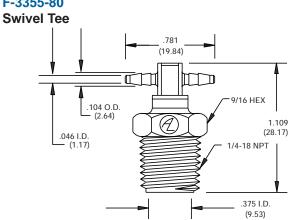


For $\frac{1}{4}$ -18 NPT x $\frac{1}{6}$ ° I.D. flexible tubing. Swivels 360°. Buna-N o-ring seal.

Material: Nylon.

F-3355-83

Swivel Tee




For ¼-18 NPT x ½2" I.D. flexible tubing. Swivels 360°. Buna-N o-ring seal.

Material: Nylon.

F-3355-85

Swivel Tee

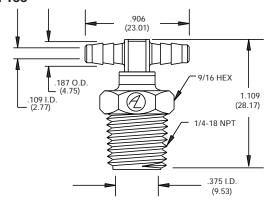

For 14-18 NPT x 10 I.D. flexible tubing. Swivels 360°. Buna-N o-ring seal.


Material: Nylon.

Straight Swivel Fittings

Patent #4,946,204

F-3150-80

Straight Swivel




For 10-32 UNF x % I.D. flexible tubing. Swivels 360°. Buna-N o-ring seal.

Material: Nylon.

F-3150-83

Straight Swivel




For 10-32 UNF x ½2" I.D. flexible tubing. Swivels 360°. Buna-N o-ring seal.

Material: Nylon.

F-3150-85

Straight Swivel



For 10-32 UNF x 1/8" I.D. flexible tubing. Swivels 360°.


Buna-N o-ring seal.

Material: Nylon.

) = Metric Dimensions

F-3250-80

Straight Swivel




For $\frac{1}{6}$ -27 NPT x $\frac{1}{6}$ ° I.D. flexible tubing. Swivels 360°. Buna-N o-ring seal.

Material: Nylon.

F-3250-83


Straight Swivel



For %-27 NPT x $\%_2$ " I.D. flexible tubing. Swivels 360°. Buna-N o-ring seal.

Material: Nylon.

F-3250-85

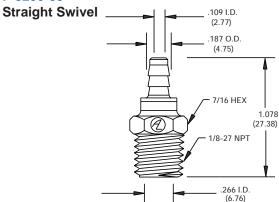


For %-27 NPT x %" I.D. flexible tubing. Swivels 360°. Buna-N o-ring seal.

Material: Nylon.


Straight Swivel Fittings

Patent #4,946,204

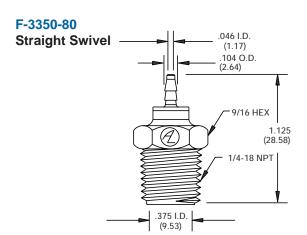


For ¼-18 NPT x $\%_6$ " I.D. flexible tubing. Swivels 360°. Buna-N o-ring seal.

Material: Nylon.

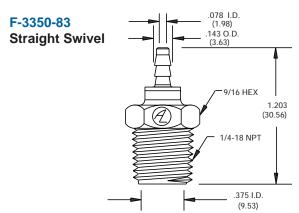

For ¼-18 NPT x $\%_2$ " I.D. flexible tubing. Swivels 360°. Buna-N o-ring seal.

Material: Nylon.

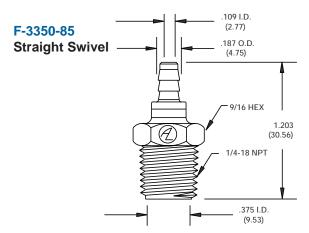

For 14-18 NPT x 10 I.D. flexible tubing. Swivels 360°. Buna-N o-ring seal.

Material: Nylon.

() = Metric Dimensions

) = Metric Dimensions

(

PRODUCT WARRANTY

WARRANTY: All references hereunder to "products" includes all pneumatic and vacuum control equipment, systems and other items which are manufactured and/or distributed by Seller. Seller warrants products manufactured and/or distributed by it to be free from defects in materials and workmanship arising from normal usage of the products, provided such defects appear or are discovered within 1 year after the purchase date of the products and, provided further that Buyer notifies Seller of such defects in writing within 30 days after the appearance or discovery thereof. All transportation charges incurred in connection with this warranty shall be borne by Buyer. If within such period, any such products shall be proven to Seller's satisfaction to be defective, such products shall be replaced or their price refunded, at Seller's option. Seller's obligation for non-performance, defective products, or any damage caused by its products or their use, and Buyer's exclusive remedy therefor, shall be limited to replacement or refund and shall be conditioned upon Seller's receiving written notice, together with a demand for such replacement or refund, within the time period specified herein. This exclusive remedy shall not be deemed to have failed its essential purpose under any circumstances so long a Seller is willing and able to replace defective products or refund the purchase price within the time specified. SELLER'S PRICES ARE BASED ON THIS POLICY LIMITING ITS, LIABILITY. IF BUYER DESIRES FOR SELLER TO PROVIDE A WARRANTY GREATER THAT THAT WHICH IS STATE ABOVE, THEN SELLER WILL EXPENSE TO SELLER WHICH SUCH A WARRANTY OBLIGATION WOULD CAUSE.

DISCLAIMER OF WARRANTY AND LIABILITY: THE FOREGOING WARRANTIES PROVIDED HEREIN ARE EXCLUSIVE AND IN LIEU OF ALL OTHER EXPRESS AND IMPLIED WARRANTIES (EXCEPT OF TITLE) INCLUDING BUT NOT LIMITED TO IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PRODUCT. Seller does not warrant its products to be suited for any particular purpose. Any suggestions made by seller concerning its products, their uses, their performance, production capabilities, quality requirements and/or suggestions with respect to equipment design, engineering, use or the like, are to be construed as suggestions only and any and all specified intended uses should be confirmed by Buyer's independent testing. Any description of the products given to Buyer by Seller are the the sole purpose of identifying them, are not a part of the basis of the bargain, and do not constitute a warranty that the products shall conform to that description. The use of any sample in connection with the sale is for illustrative purposes only, is not a part of the basis of the bargain and is not to be construed as a warranty that the product will conform to that sample. None of the Seller's agents, employees, or representatives have any authority to bind Seller to any affirmation, representation or warranty other than those state herein. Seller shall not be subject to any other obligations or liabilities whatsoever with respect to this agreement, products manufactured and/or distributed by it or any undertakings, acts or omissions relating thereto.

It shall be the sole responsibility of Buyer and/or User to comply with all federal, state and local rules and regulations concerning the use of products described herein or on the face hereof and shall not be the responsibility of Seller.

DISCLAIMER OF CONSEQUENTIAL DAMAGES AND OTHER LIABILITY: Seller's liability with respect to breaches of warranty shall be limited as provided herein. With respect to other breaches of this agreement, Seller's liability shall in no event exceed the contract price. SELLER SHALL NOT BE SUBJECT TO AND DISCLAIMS: (1) ANY OTHER OBLIGATIONS OR LIABILITIES ARISING OUT OF A BREACH OF CONTRACT OR OF WARRANTY (2) ANY OBLIGATIONS WHATSOEVER ARISING FROM TORT CLAIMS (INCLUDING NEGLIGENCE AND STRICT LIABILITY) OR ARISING UNDER OTHER THEORIES OF LAW WITH RESPECT TO PRODUCTS SOLD OR SERVICES RENDERED BY SELLER, OR ANY UNDERTAKINGS, ACTS OR OMISSIONS RELATING THERETO, AND (3) ALL CONSEQUENTIAL, INCIDENTAL AND CONTINGENT DAMAGES WHATSOEVER. Without limiting the generality of the foregoing, Seller specifically disclaims any liability for penalties (including administrative penalties), special or punitive damages, damages for lost profits or revenue, loss of products or any associated equipment, cost of capital, facilities or services, downtime, shutdown or slow-down costs, of for any other types of economic loss. All of the limitations and disclaimers contained in this paragraph and in the rest of this agreement shall apply to claims of Buyer's customers or any third party. Buyer shall indemnify Seller against any and all losses, liabilities, damages and expenses, (including, without limitation, attorney's fees and other costs of defending any action) which Seller may incur as a result of any claim by Buyer or others arising out of and/or in connection with the products and/or services sold hereunder and based on any product or service defect not proven to have been caused solely by Seller's negligence.

No waiver, alteration or modification of the foregoing shall be valid, unless made in writing and signed by an executive officer of Seller. Seller reserves the right to alter product designs and materials, when conditions warrant, without notice.

WARNING: Do not use these products when pressures or temperatures can exceed their rated operating conditions. See the applicable product specifications.

When using products made from polysulfone, please check material compatibility. Certain chemicals or contaminants can attack polysulfone and cause the product to fail.

Seller}s products are not sold for applications in any medical equipment intended for use as a component of any life support system unless a specified written agreement pertaining to such intended use is executed between Seller and Buyer. Such agreement will require the equipment manufacturer either to contract for additional reliability testing of Seller's products and/or a commitment to undertake such testing as a part of its manufacturing process. In addition, Buyer must agree to indemnify and hold harmless Seller from any claims arising out of the use of Seller's products in life support equipment.

DISTRIBUTOR:



Div. of Fred Knapp Engraving Co., Inc. 5102 Douglas Avenue, Racine, Wisconsin 53402 Phone: 262-639-9035, Toll Free: 800-558-5950, Fax: 262-639-5996 http://www.air-logic.com • e-mail: airlogic@air-logic.com