



A MEMBER OF THE ESTUN GROUP

# TRIO MOTION TECHNOLOGY DX3 SERVO PACKAGES

- THE MOTION SPECIALIST -

# DX3

## 200V - 400V Servo Solutions

### Cost Optimised Servo Drive

DX3, the single-axis ac servo drive, is designed to create the most cost-effective optimised entry level solution with excellent performance and practical control functions. The Trio DX3 drive is compatible with Trio MX servo motors and Trio *Motion Coordinators* to provide high-speed, high-precision, high performance machine solutions.

With a power range from 50W to 7.5kW and options for EtherCAT, or Conventional (Pulse & Direction, Analogue and CANopen) control, DX3 will suit a wide variety of machine types.

DX3 is fully integrated into Trio's application development tool, *Motion Perfect*, our software environment for system planning, configuration, virtualisation and machine programming.



#### AT A GLANCE

- \* Fully integrated into *Motion Perfect*
- \* Matched with MX motor range
- \* Internal drive protection functions
- \* Comprehensive tuning technology
- \* Field upgradable firmware
- \* Electronic nameplate
- \* Compact size
- \* Zero stacking
- \* 200V ac from 50W to 2kW
- \* 400V ac from 1kW to 7.5kW
- \* 350% overload
- \* USB commissioning
- \* Keypad interface
- \* 2 Touch Probe inputs
- \* EtherCAT or Conventional (Pulse & Direction, Analogue, CANopen) control

# DX3 200V - 400V Servo Solutions

## Specifying Your Drives

Model	# Axes	Power	Voltage	Options	Version
<b>DX3</b>	<b>- 1</b>	<b>20</b>	<b>A</b>	<b>E</b>	<b>A</b>

DX3 comes in power ratings from 50W to 7.5kW. Matched with the MX series motors it offers high-dynamic performance and high-precision with electronic nameplate to simplify configuration for machine solutions.

<b>A5</b>	<b>0.05kW</b>	<b>A</b>	<b>200V ac</b>	<b>E</b>	<b>EtherCAT</b>	<b>A</b>	<b>Revision</b>
<b>01</b>	<b>0.1kW</b>	<b>D</b>	<b>400V ac</b>	<b>M</b>	<b>Pulse/Dir</b>		
<b>02</b>	<b>0.2kW</b>						
<b>04</b>	<b>0.4kW</b>						
<b>08</b>	<b>0.75kW</b>						
<b>10</b>	<b>1kW</b>						
<b>15</b>	<b>1.5kW</b>						
<b>20</b>	<b>2kW</b>						
<b>30</b>	<b>3kW</b>						
<b>50</b>	<b>5kW</b>						
<b>75</b>	<b>7.5kW</b>						



### Integration Efficiency

Rapid application development of controller and drive configuration within *Motion Perfect*.



### Space Efficient

Compact single axis servo drive. Zero stacking to save panel space



### Design Efficient

One system to program, simplifying development and any future production changes when required.



### Cost Efficient

Developed to be cost optimised, entry level servo drive with either EtherCAT or Pulse/Direction, Analogue and CANopen interfaces.

# DX3 200V Servo Solutions

## Specification

Product	Part #	Output Power	H	W	D
<b>200V ac</b>					
DX3-1A5AEA	D3000	50W	172	40	180
DX3-1A5AMA	D3020				
DX3-101AEA	D3001	100W	172	40	180
DX3-101AMA	D3021				
DX3-102AEA	D3002	200W	172	40	180
DX3-102AMA	D3022				
DX3-104AEA	D3003	400W	172	40	180
DX3-104AMA	D3023				
DX3-108AEA	D3004	750W	172	55	180
DX3-108AMA	D3024				
DX3-110AEA	D3005	1kW	172	55	180
DX3-110AMA	D3025				
DX3-115AEA	D3006	1.5kW	172	70	180
DX3-115AMA	D3026				
DX3-120AEA	D3007	2kW	172	70	180
DX3-120AMA	D3027				


<b>200Vac</b>								
Drive Model: DX3-	1A5A	101A	102A	104A	108A	110A	115A	120A
Continuous output current [Arms]	0.9	1.1	1.5	2.9	5.1	6.9	9.5	12.6
Maximum output current [Arms]	3.3	4	5.8	11.5	19.5	21	31.6	42
Main power supply unit capacity [kVA] (single phase)	0.2	0.3	0.6	1.2	1.9	2.6	4.0*	-
Main power supply capacity [kVA] (three-phase)	-	-	-	-	1.6	2	3	3.5

\*: When operating from a single-phase power supply for the DX3-15AEA (rated power 1.5 kW), please derate to 1.2 kW.

Products ending with **AEA / DEA** = **EtherCAT**

Products ending with **AMA / DMA** = **Conventional**

Preliminary specifications may change without notice

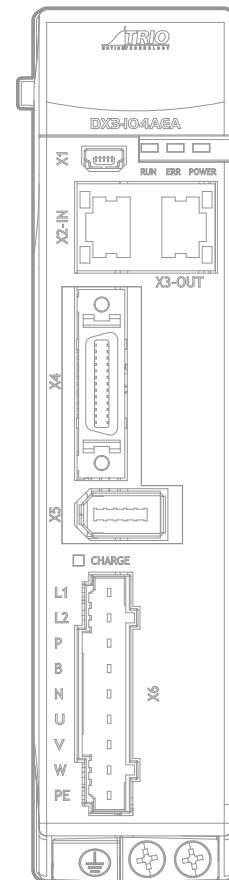


DX3-1A5AEA/AMA

DX3-101AEA/AMA


DX3-102AEA/AMA

DX3-104AEA/AMA

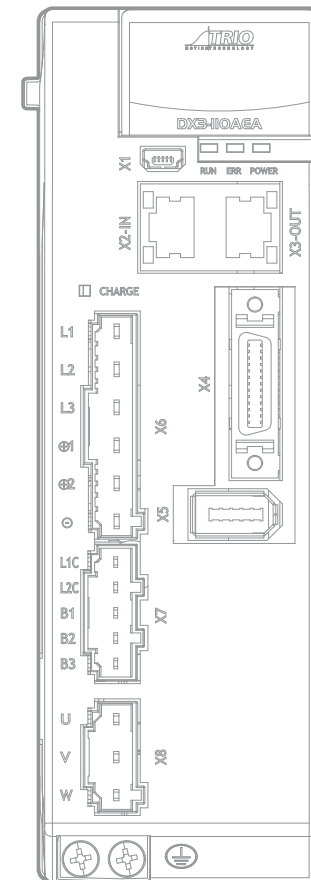

DX3-108AEA/AMA

DX3-110AEA/AMA

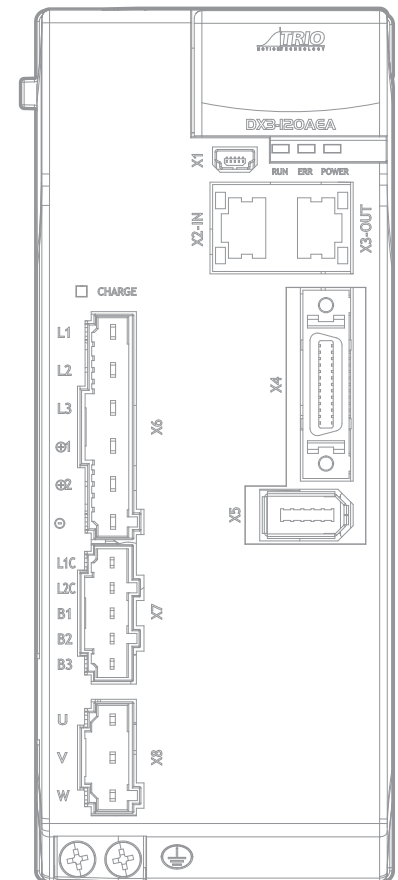

DX3-115AEA/AMA


DX3-120AEA/AMA

# DX3 400V Servo Solutions

## Specification


Product	Part #	Output Power	H	W	D
<b>400V ac</b>					
DX3-110DEA	D3010	1kW	172	60	180
DX3-110DMA	D3030				
DX3-115DEA	D3011	1.5kW	172	60	180
DX3-115DMA	D3031				
DX3-120DEA	D3012	2kW	172	85	180
DX3-120DMA	DD032				
DX3-130DEA	D3013	3kW	172	85	180
DX3-130DMA	D3033				
DX3-150DEA	D3014	5kW	260	90	230
DX3-150DMA	D3034				
DX3-175DEA	D3015	7.5kW	260	90	230
DX3-175DMA	D3035				

<b>400Vac</b>						
Drive model: DX3-	110D	115D	120D	130D	150D	175D
Continuous output current [Arms]	3.6	5	7.1	12	17	27.3
Maximum output current [Arms]	10.9	16.3	24.7	37.8	53	70.7
Main power supply capacity [kVA] (three-phase)	1.8	2.8	3.5	5	8.2	12

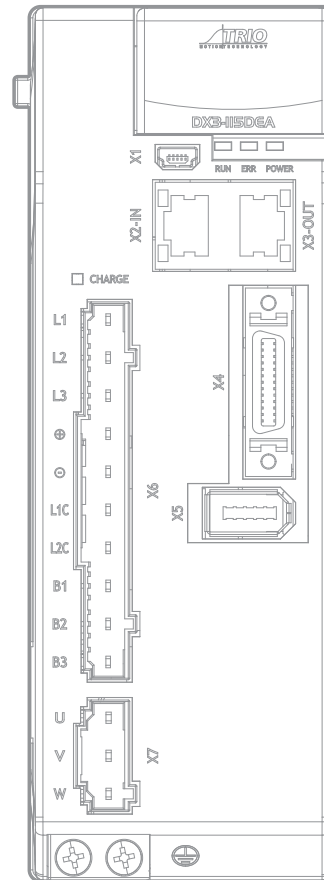


DX3-110DEA/DMA

DX3-115DEA/DMA

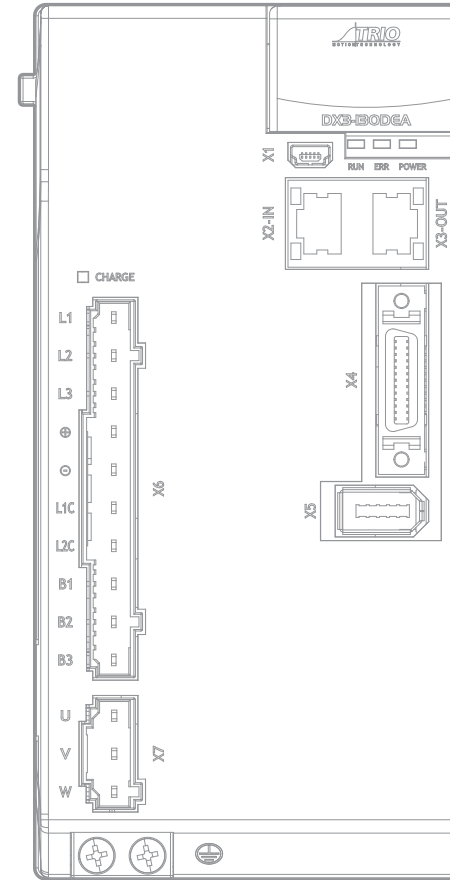

DX3-120DEA/DMA

DX3-130DEA/DMA

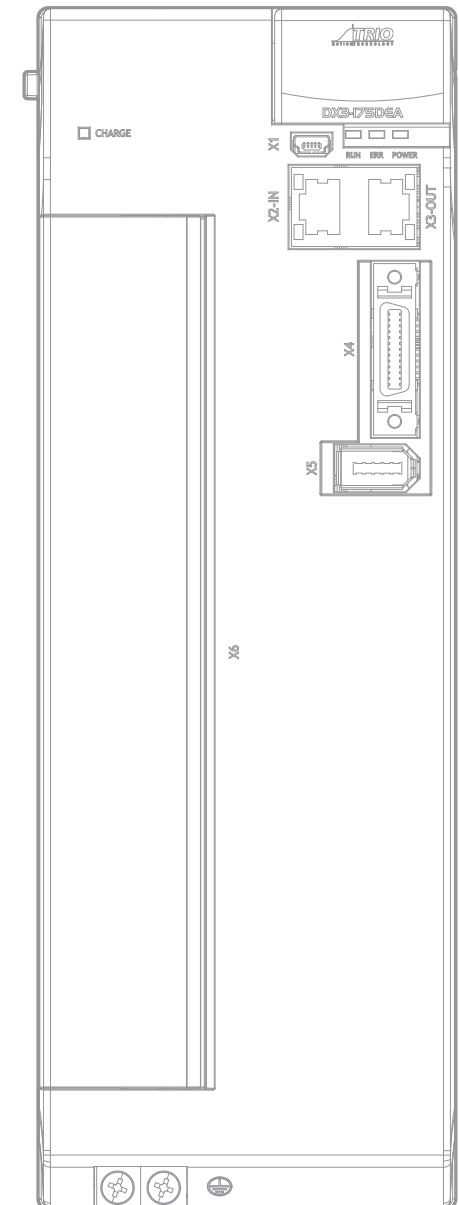



DX3-150DEA/DMA

DX3-175DEA/DMA

Products ending with **AEA / DEA** = EtherCAT  
 Products ending with **AMA / DMA** = Conventional

# DX3 Wiring Solution Example



## EtherCAT Model Configuration (50W - 400W)

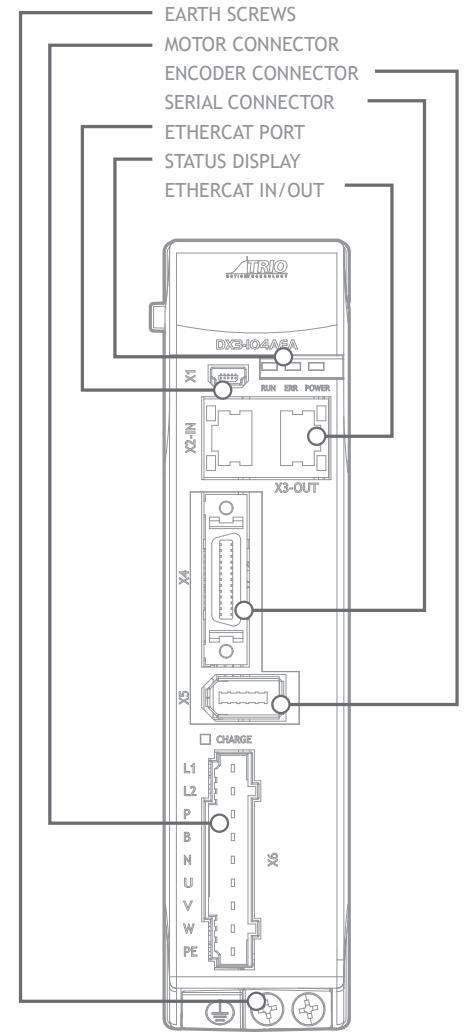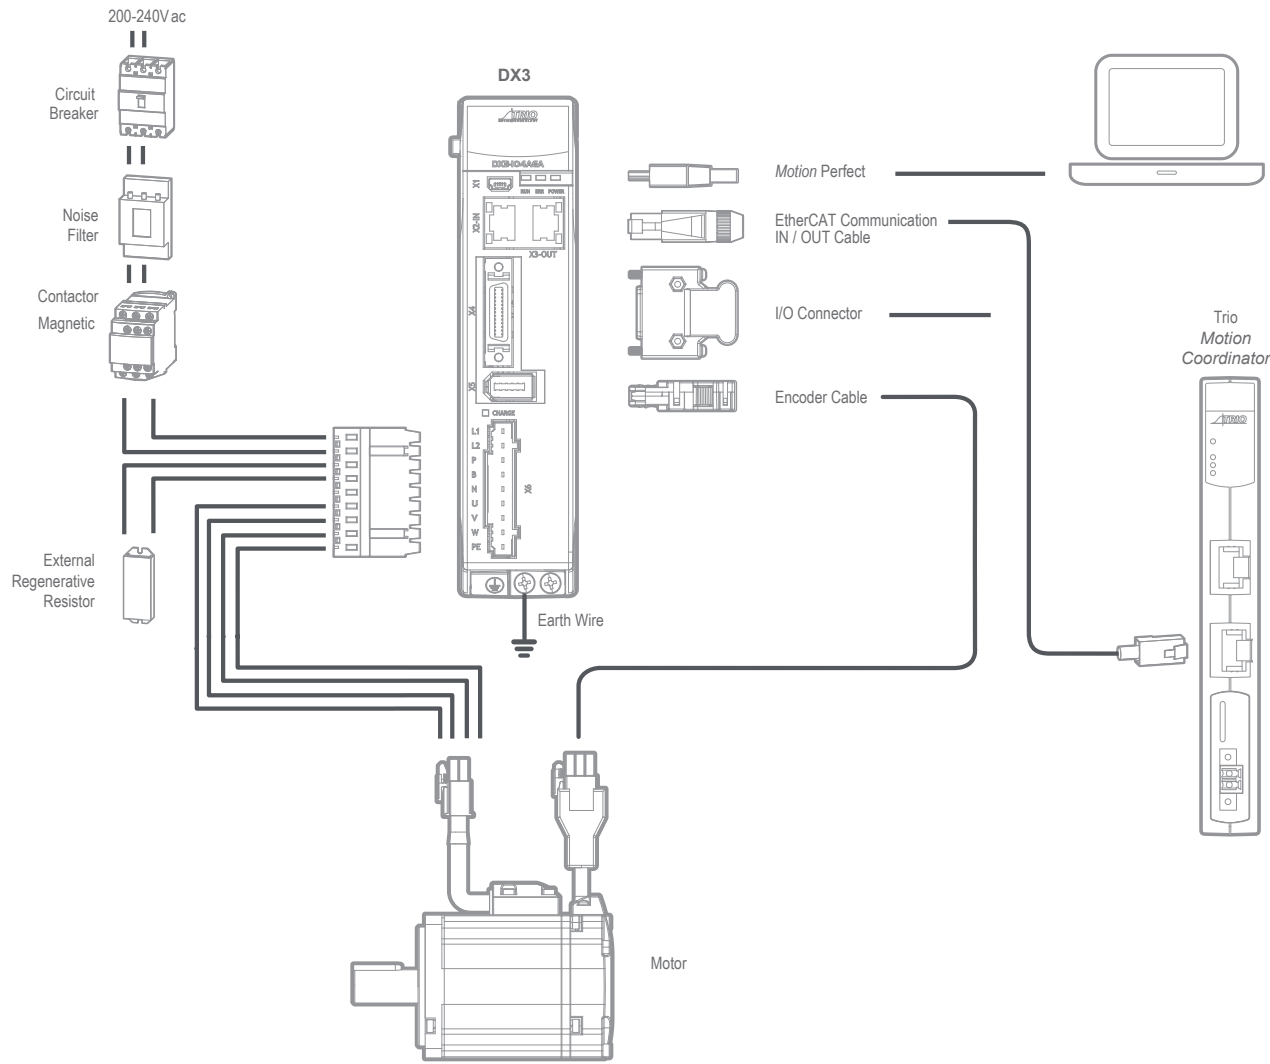

Example illustration showing **AEA / DEA = EtherCAT**

# DX3 Wiring Solution Example

## Pulse / Dir Model Configuration (50W - 400W)

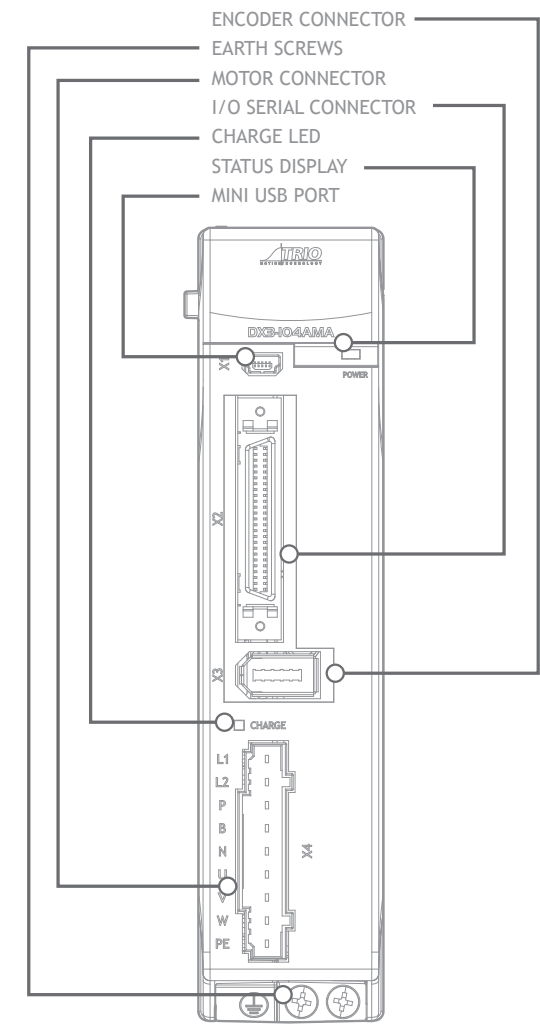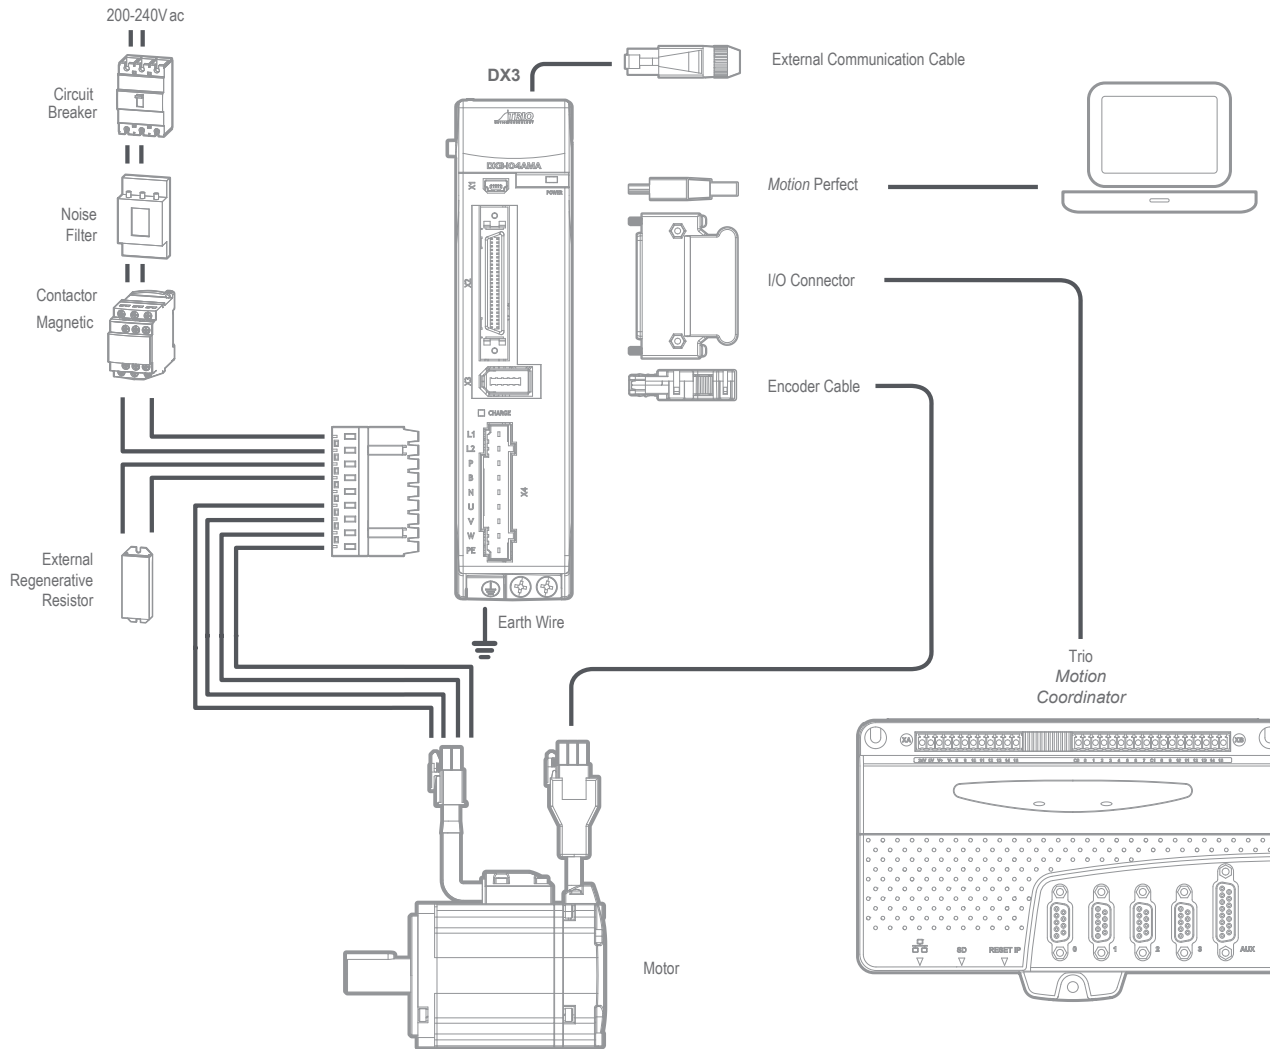

Products ending with **AMA / DMA** = **Conventional**

# DX3

## 200V - 400V Servo Solutions

### All Models Specification

Universal specifications		description	
Input power	200VAC	Single-phase AC 200V ~ 240V, -15% ~ +10%, 50Hz/60Hz Three-phase AC 200V ~ 240V, -15% ~ +10%, 50Hz/60Hz (rated power ≥0.75kW)	
	400VAC	Three Phase AC 380V ~ 440V, -15% ~ +10%, 50Hz/60Hz	
Control the power supply	200VAC	Single phase AC 200V ~ 240V, -15% ~ +10%, 50Hz/60Hz	
	400VAC	Three phase AC 200V ~ 440V, -15% ~ +10%, 50Hz/60Hz	
Control mode		SVPWM control	
Feedback		Serial communication encoder with MX motors	
Terms of use	Working environment	Temperature	When using a single device: -5°C ~ 55°C When multi-device is installed closely: -5 °C ~ 40 °C
		Humidity	5% to 95% RH (no condensation)
	Storage environment	Temperature	-20°C ~ 85°C
		Humidity	5% to 95% RH (no condensation)
	Protection class		IP20
	Altitude		1000m or less
	Vibration resistant		4.9m/s <sup>2</sup>
Impact resistant		19.6m/s <sup>2</sup>	
Power system		TN system	
Installation structure		Base mounting	
Performance	Speed control range	1:5000	
	Speed volatility	The rated speed ± less than 0.01% (when the load fluctuates: 0% to 100%) 0% of the rated speed (voltage fluctuations: at ± 10%) The rated speed is ± below 0.1% (temperature fluctuations: 25°C±25°C)	
	Soft-start settings	0 ~10s (acceleration and deceleration can be set separately)	
	Input signal	Operating voltage range: 24 VDC±20% Number of input channels: 5 on AEG/DEG, 10 on AMG/DMG	
	Output signal	Operating voltage range: 5 VDC to 30 VDC Number of output channels: 3 on AEG/DEG, 5 on AMG/DMG	
USB port	Communication standards	Conforms to USB 2.0 standard (12 Mbps), OTG	
Commissioning Ports		USB EtherCAT (CoE) (only available on AEG/DMG)	
Commissioning Software		<i>Motion Perfect</i>	
Display		5-digit	
Operator Panel		4 buttons	
Indicator Lamps		CHARGE, POWER	
Regenerative braking		Products with rated power of 50W to 400W do not have built-in braking resistors Products with a power rating of 750W to 7.5kW have built-in braking resistors	
Protection features		Overcurrent, overvoltage, undervoltage, overload, regeneration anomaly, overspeed, etc	
Accessibility		Alarm recording, Jog operation, load inertia identification, mechanical analyzer, automatic tuning tools, etc	



# DX3 200V - 400V Servo Solutions

## EtherCAT Model (AEA, DEA) Specification

## Conventional (AMA, DMA) Specification

EtherCAT Specifications	Description
Applicable communication standards	IEC 61158 Type12, IEC 61800-7 CiA402 Drive Profile
Physical layer	100BASE-TX (IEEE802.3)
Bus connection	X2-IN (RJ45): EtherCAT Signal IN
	X3-OUT (RJ45): EtherCAT Signal OUT
Cable	Category 5 twisted pair (4 pairs of shielded twisted pairs).
Sync Manager	SM0: Output mailbox, SM1: Enter mailbox
	SM2: Output process data, SM3: Input process data
FMMU	FMMU0: Maps to the Process Data (RxPDO) output area
	FMMU1: Maps to the Process Data (TxPDO) send zone
	FMMU2: Maps to mailbox status
EtherCAT Commands (Data Link Layer)	APRD, FPRD, BRD, LRD, APWR, FPWR, BWR, LWR, ARMW, FRMW
PDO data	Dynamic PDO mapping
MailBox(CoE)	Emergencies, SDO requests, responses, SDO information (TxPDO/RxPDO and remote TxPDO/RxPDO are not supported)
MailBox(FoE)	Support FOE firmware upgrade
Distributed Clock (DC)	Free-run mode and DC mode (switchable)
	DC synchronization period: 125 $\mu$ s to 8ms
Slave Information Interface	2048 bytes (read-only)
CiA402 Drive Profile	Homing mode, Profile position mode, Profile velocity mode, Profile torque mode, Interpolated position mode, Cyclic synchronous position mode, Cyclic synchronous velocity mode, Cyclic synchronous torque mode, Touch probe function, Torque limit function
FoE (File Over EtherCAT)	Download new firmware via FoE

Step/Pulse Model Specifications		Description	
Torque Control	Analogue reference	Reference Voltage	$\pm 10$ VDC at rated torque Max. input voltage: $\pm 12$ V
		Input Impedance	10M $\Omega$ or above
		Circuit Time Constant	10 $\mu$ s
	Torque Selection	Presets	4 torque selections
Speed Control	Analogue reference	Reference Voltage	$\pm 10$ VDC at rated speed Max. input voltage: $\pm 12$ V
		Input Impedance	10M $\Omega$ or above
		Circuit Time Constant	10 $\mu$ s
	Speed selection	Presets	7 speed selections
Position Control	Pulse reference	Type	Pulse + Direction CCW + CW Pulse A/B Quadrature
		Voltage	5V
		Max Frequency	500kHz (differential) 200kHz (single ended)
CANopen	CiA402 Drive Profile	Homing mode, Profile position mode, Profile velocity mode, Profile torque mode, Interpolated position mode	
Encoder output	Type	A/B/Z Quadrature	
	Voltage	5V	
	Max Frequency	500kHz (differential)	

*Everything you need... Nothing more*



# TRIO Worldwide Network

**TRIO OFFICES**  
 UK - Tewkesbury HQ  
 USA - Pittsburgh  
 India - Pune  
 China - Shanghai  
 Italy - Milan

**R&D Centres**  
 2 x Control & Software Technology  
 2 x Servo Drives & motors

**EUROPE**  
 BELGIUM  
 DENMARK  
 FRANCE  
 GERMANY

HUNGARY  
**ITALY**  
 NETHERLANDS  
 NORWAY

POLAND  
 PORTUGAL  
 ROMANIA  
 SLOVAKIA

SLOVENIA  
 SPAIN  
 TURKEY

**NORTH AMERICA**  
 ALABAMA  
 ARIZONA  
 CALIFORNIA  
 ONTARIO  
 QUEBEC  
 COLORADO  
 CONNECTICUT  
 FLORIDA  
 GEORGIA  
 ILLINOIS  
 INDIANA  
 IOWA  
 MASSACHUSETTS  
 MEXICO  
 MICHIGAN  
 MINNESOTA  
 MISSISSIPPI  
 NEW JERSEY  
 NEW YORK  
 NORTH CAROLINA  
 OHIO  
**PENNSYLVANIA**  
 SOUTH CAROLINA  
 TENNESSEE  
 TEXAS  
 UTAH  
 VIRGINIA  
 WASHINGTON  
 WISCONSIN

**SOUTH AMERICA**  
 ARGENTINA  
 BRAZIL

**MIDDLE EAST**  
 ISRAEL  
 UAE

**ASIA**  
 INDIA  
 KOREA  
 SINGAPORE  
 TAIWAN  
 THAILAND

**CHINA**  
 BEIJING  
 DONGGUAN  
 GUANGDONG  
**SHANGHAI**  
 YANTAI


**OCEANIA**  
 AUSTRALIA  
 NEW ZEALAND

**4**  
**R&D Centres**

**18**  
**Integrators**

**32**  
**Countries of Sale**

**103**  
**Sales Partners Globally**

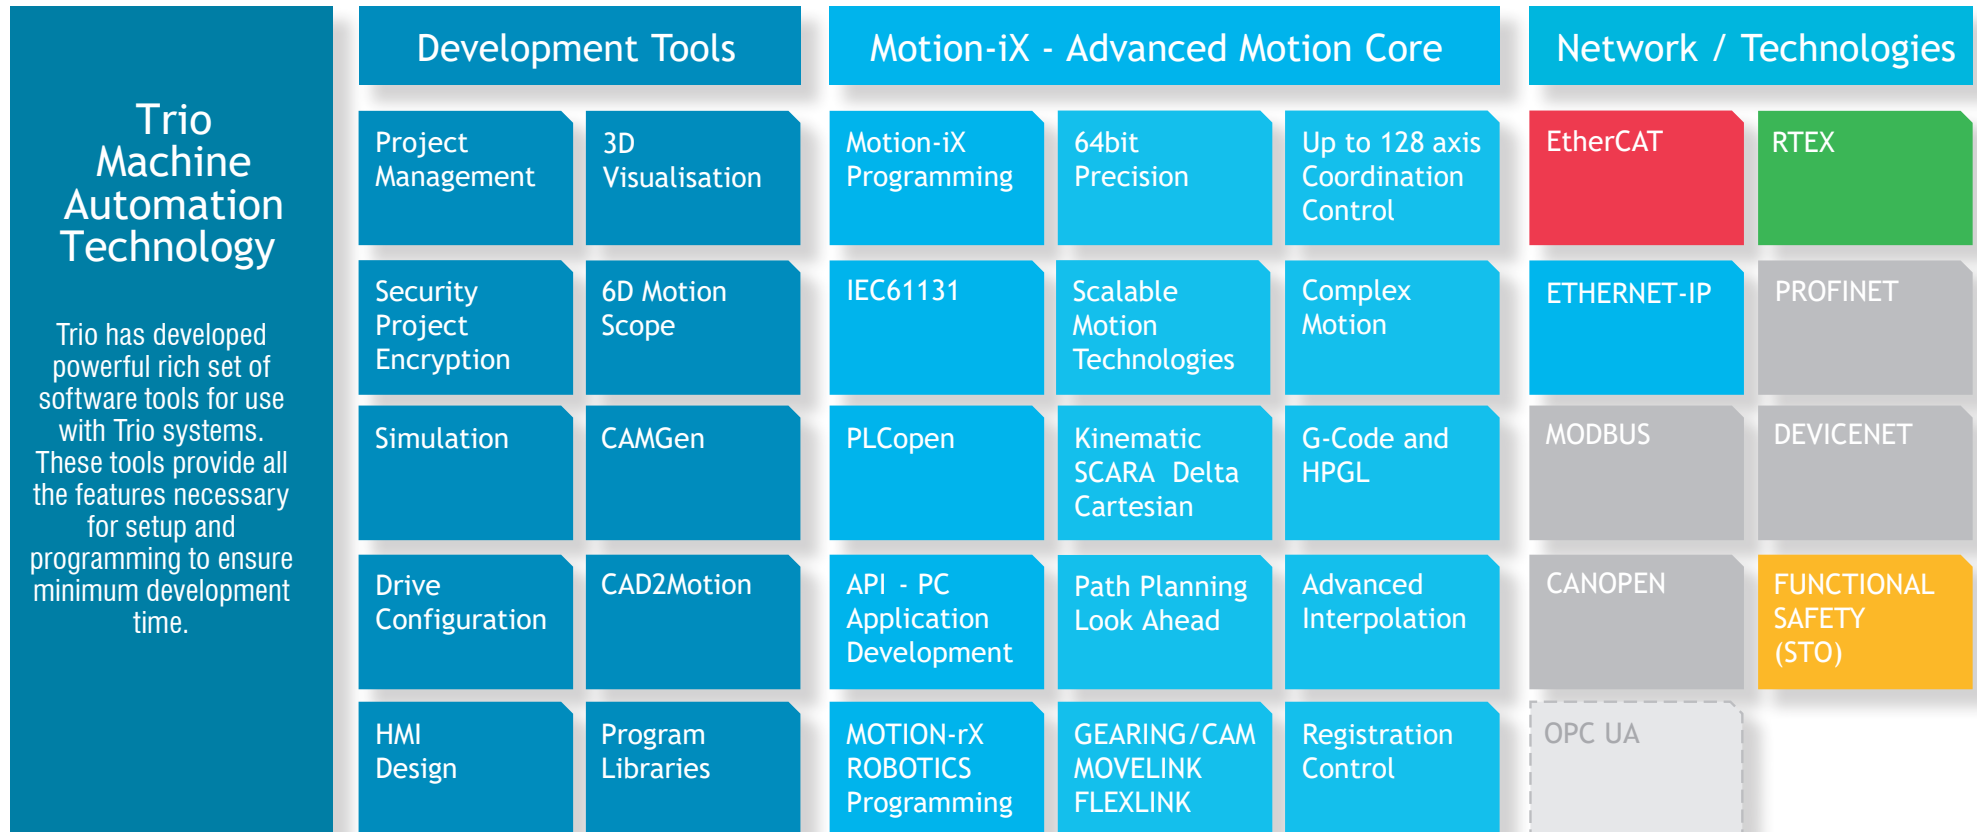

Combining an advanced motion core with Trio's ease-of-use, Motion-iX offers performance and dependability of packaged solutions, from "The Motion Specialist", where motion is the core and not just a bolt-on capability.

Motion-iX – a unified software engineering framework for machine development, that places the focus on optimising motion and complex kinematics, including robotics such as SCARA, to deliver truly optimal machine control performance.

Motion-iX includes development in IEC61131 and PLCopen, and boasts inverse kinematics capabilities to truly coordinate all machine axes as one, including

robots to maintain tight synchronisation or robots and machine as one. Virtualization allows simulation of the mechanics and motion to significantly reduce development and testing, delivering optimal control every time, by minimising machine cycle times.


# Motion Perfect

Design, Develop, Test, Deploy and Secure

Built on Trio's **Motion-iX** core technology, *Motion Perfect* provides the user with a re-designed easy to understand interface for rapid application development, controller and drive configuration and monitoring of functions.

The commissioning of DX Servo Drives is made simple with a series of Device Configuration Screens allowing access to status information and diagnostics at a glance. All motor axes can be detected, setup, monitored and controlled in real-time from the easy to use dialogue windows.

*Motion Perfect* includes access to IEC 61131 and PLCopen and the robotics solution; TrioRPS. Advanced visualisation including a 3D oscilloscope and IP protection of your projects are also included within *Motion Perfect*.

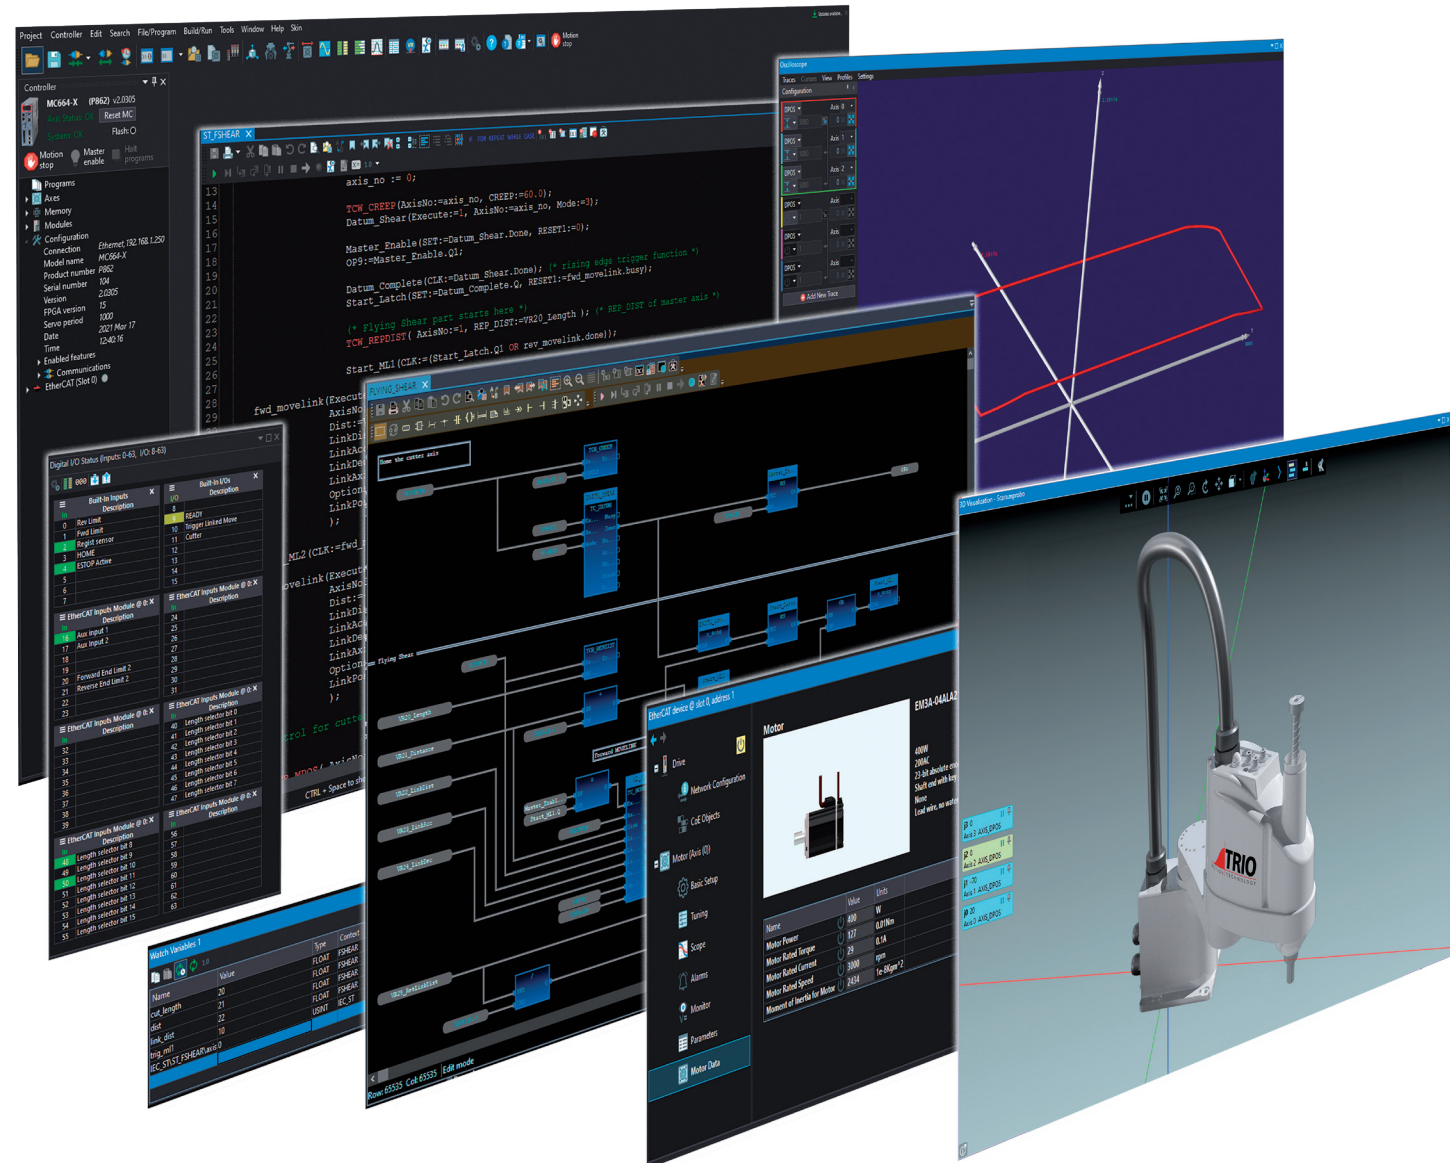



A MEMBER OF THE **ESTUN** GROUP

## TRIO MOTION TECHNOLOGY DX3 SERVO PACKAGES



Trio Motion Technology specialises in advanced motion control as a core, providing a range of *Motion Coordinators*, drives and motors, expansion interfaces, I/O modules and HMI's built on *Motion-ix* technologies and designed to enable the control of industrial machines with the minimum of external components.

In support of the Trio concept, we aim to offer the best technical support by telephone, email, our comprehensive website and training courses held throughout the year. Please look at our web site for details.

[www.triomotion.com](http://www.triomotion.com)

TRIO MOTION TECHNOLOGY  
UK | USA | CHINA | INDIA  
[WWW.TRIMOTION.COM](http://WWW.TRIMOTION.COM)

©Trio Motion Technology 2022. All Trademarks are acknowledged.  
Specifications may be subject to change without notice. E & O.E.

Version 1-DX3 Servo Packages brochure-2022